TJK Assembly Instructions

CARTON CONTENTS

Please check to be sure that all parts are included before proceeding with assembly. Contact your local dealer if any parts are missing.

Note: The grill is partially assembled. The Burner, Spider Guards, Venturis, Ignitor Collector Box and the Stainless Steel Handle are installed. Also, for LP units the Gaslow Regulator and Hose are installed.

MODEL TJK Grill

Parts	***Quantity***
Top Lid Assembly	1
Bottom Casting (Grill Head)	1
Warming Rack	1
Bottom Grate	1
Stainless Steel Cooking Grids	2 (SearMagic 3)
Control Panel Brackets	2
Heat Shield	1
Grease Cup Holder	1
Control Panel Assembly	1
Valve Control Knobs	2
Ignitor Knob	2
Stainless Steel Side Shelf	2
Side Shelf Bracket	2
Condiment Holder	2
Venturi Tube Cleaning Brush	1
Bag of Briquettes (67 pieces)	1
Meat Probe	1
Forked Grid Cleaning Tool	1 (SearMagic Only)

Hardware	***Quantity***
Connecting Wire for Ignitor	1
¼-20 x 1½" Rd. Hd. Sltd. Bolt	2
¼-20 x 1¼" Rd. Hd. Sltd. Bolt	4
10-24 x 1¼" Rd. Hd. Bolt	8
¼-20 x ¾" Hex Head Bolt	3
¼-20 x ½" Rd. Hd. Sltd. Bolt	2
10-24 KEP Nut	8
¼-20 KEP Nut	11
Keeper Washer	2
Flat Washer for Ignitor	1
1/8 – 27 Jam Connecting Nut	1
Lid Pivot Pin	2
Hitch Pin for Lid	2

TJK Assembly Instructions

Grill Head Assembly Instructions

- ***The grill head bottom must be attached to the mount before starting.***
- ***It is easiest to work with the grill in the upright position.***
- ***Leak test all gas connections before using.***
- ***Caution: Combustible material should never be within 24 inches of the top, bottom, back or sides of your MHP Gas Barbecue Grill.***

Complete View of TJK Grill

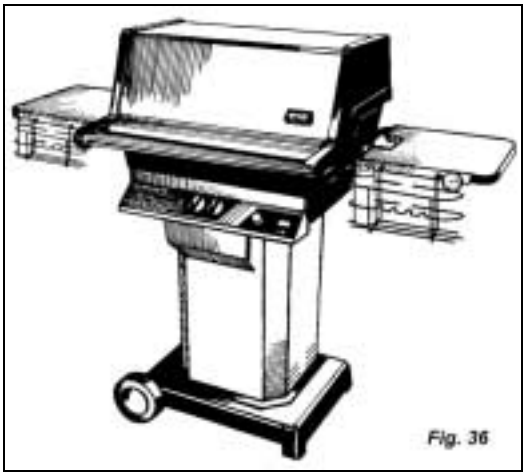

IMPORTANT: Most of the TJK Model major component assembly is the same as the JNR/ WNK Models. Please refer to the JNR/WNK assembly instructions as indicated.

Step 1: Control Panel & Heat Shield

(See JNR/WNK instructions on page 15, *Fig. 19 & 20*)

Step 2: Connect The Gas Supply Line

(See JNR/WNK instructions, item D on page 17, *Figs. 25-28*)

Step 3: Attaching the TJK Side Shelf (*Fig. 37*)

1. Fasten the Shelf Bracket to the Right side of grill head bottom with two ¼-20 x 1¼" Rd. Hd. Sltd bolts and ¼-20 Kep nuts.
2. Attach the Shelf and the Condiment Holder to the Brackets. All four 10-24 x 1¼" bolts should be inserted into the bracket before tightening them with 10-24 Kep nuts..
   (**Note: Repeat steps 1 and 2 to attach the other side shelf.)**

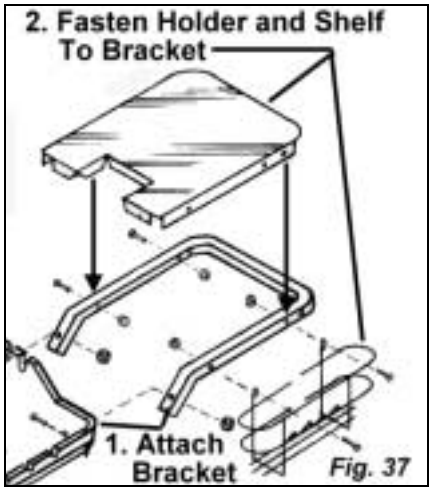

Step 4: Attaching the Grill Lid

(See JNR/WNK instructions on page 18, *Fig 30*.)

Step 5: Grates, Briquettes and Cooking Grids

(See JNR/WNK instructions on page 18, *Fig. 32*)

Step 6: Warming Rack *(Fig. 38 & 39)*

1. The Warming Rack connects to the grill lid and the grill head bottom. First, insert the right Top and Bottom Rods into their respective mounting holes on right side of the grill lid and grill head bottom. Then slide the RACK to your left, positioning the left Top and Bottom Rods into their respective mounting holes simultaneously. The Lower Right Rod End can then be "popped" into place by flexing it inward.

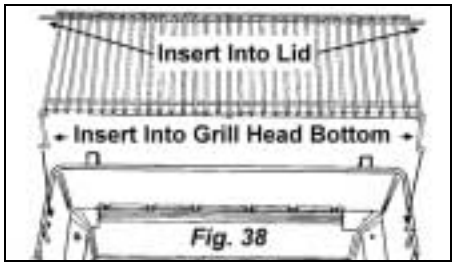

2. The SearMagic Warming Rack drops onto the top edge of the grill head bottom. The warming rack bracket is positioned between the hinges of the grill head bottom inside back wall.

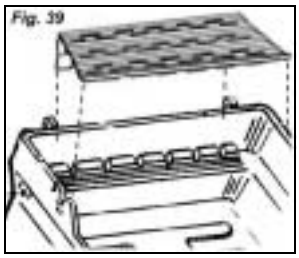

Before using your grill, leak test all gas line connections. And follow the lighting instructions. See page 23.